


# CHILD COUPLING END STYLE NOMENCLATURE



Child couplings feature description by combining end-style codes shown below that make thread end identification fast and easy. Always refer to Child Crimp Data Charts when selecting hose and coupling combinations.

In the following example, the Child description **SFJ90C-0906SS** identifies a Supercrimp Female JIC swivel 90° Close drop Stainless Steel coupling for -09 (9/16") thread and -06 (3/8") hose size (Child couplings indicate thread size first).

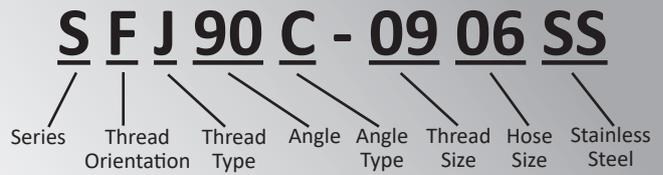

| Code                      | Description                     |
|---------------------------|---------------------------------|
| <b>Series</b>             |                                 |
| E                         | Ezicrimp – 1 Piece              |
| S                         | Supercrimp – 2 Piece            |
| C5                        | Field-Fit – Suit R5 Hose        |
| C5E                       | Field-Fit – Suit R5E Hose       |
| R                         | Field-Fit – Suit G1,G2, R3 Hose |
| L                         | Lock-On – Suit Pushlock Hose    |
| <b>Thread Orientation</b> |                                 |
| F                         | Female                          |
| M                         | Male                            |
| <b>Thread Type</b>        |                                 |
| B                         | BSP Tapered                     |
| DKL                       | DIN Light Series                |
| DKS                       | DIN Heavy Series                |
| DKO                       | DIN Heavy Series & O-Ring       |
| FL                        | Flange Code 61                  |
| FLH                       | Flange Code 62                  |
| FLK                       | Flange Komatsu                  |
| FO                        | Flat Face O-Ring (ORFS)         |
| G                         | Grease Fitting                  |
| GAZ                       | French GAZ                      |
| HJ                        | Hose Joiner                     |
| IX                        | Inverted Flare                  |
| J                         | JIC                             |
| K                         | JIS-Metric (Japanese)           |
| LS                        | Life Saver                      |
| N                         | NPT                             |
| NF                        | NPT – Female Fixed              |

| Code                               | Description                |
|------------------------------------|----------------------------|
| <b>Thread Type (Continued)</b>     |                            |
| NL                                 | NPT – Long Series          |
| NP                                 | JIS-BSPP (Japanese)        |
| OX                                 | SAE O-Ring Boss Swivel     |
| P                                  | BSP Parallel               |
| R                                  | Encapsulated O-Ring (BSPP) |
| S                                  | SAE                        |
| SS                                 | Staple Series              |
| <b>Angle</b>                       |                            |
| (None)                             | Straight                   |
| 22                                 | 22.5° Bend                 |
| 30                                 | 30° Bend                   |
| 45                                 | 45° Bend                   |
| 60                                 | 60° Bend                   |
| 67                                 | 67.5° Bend                 |
| 90                                 | 90° Bend                   |
| 110                                | 110° Bend                  |
| 135                                | 135° Bend                  |
| <b>Angle Type</b>                  |                            |
| (None)                             | Standard Drop              |
| C                                  | Close Drop                 |
| S                                  | Short Drop                 |
| M                                  | Medium Drop                |
| L                                  | Long Drop                  |
| <b>Material or Special Request</b> |                            |
| (None)                             | Steel                      |
| SS                                 | Stainless Steel            |
| Z                                  | Special Request            |