




SLP Series

The **STREAMLINE PHASING CYLINDER**, or **SLP** is based on the **SLH** design and benefits from the same design features but is fitted with the patented PTE re-phasing valve. The cylinders come in a range of sizes developed to form synchronised sets. The unique valve design allows for re-phasing of cylinders at either end of their stroke.

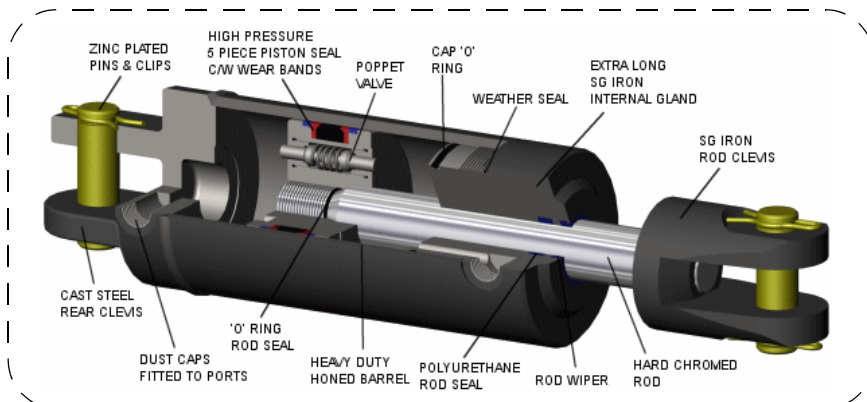

NB: To complete the above part number, replace ** with the stroke length, i.e. 8" = 08.

DIMENSIONS

Part No.	BORE	ROD	PORT	PIN	A	B	C	D	E	F	G	H	I	J	K	L	M	N
SLP 250**	2.5"	1.125"	3/4"	1"	311	100	43	32	30	43	125	48	30	62	27	62	74	76
SLP 275**	2.75"	1.125"	3/4"	1"	311	100	43	32	30	43	125	48	30	62	27	62	81	76
SLP 300**	3.0"	1.25"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	88	76
SLP 325**	3.25"	1.25"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	105	76
SLP 350**	3.5"	1.375"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	105	76
SLP 375**	3.75"	1.375"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	108	76
SLP 400**	4.0"	1.375"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	114	76
SLP 425**	4.25"	1.375"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	121	76
SLP 450**	4.5"	1.5"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	127	76
SLP 475**	4.75"	1.5"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	134	76
SLP 500**	5.0"	1.5"	3/4"	1"	311	86	43	32	30	43	135	48	30	62	27	62	140	76

