

∞walvoil

MONOBLOCK VALVES **SDM080 Series**


1 to 4 sections for open and closed centre.
Fitted with main pressure relief and load hold check.
Available in parallel or tandem circuit.
Optional high pressure carry-over port.
14mm Ø interchangeable spools.
Available with microswitch and cable spool controls.




Part No.	No. Spools	Nom. Flow	Max. Press. P,A,B	Max. Press. T	Ports (BSPP)		DIM A (mm)
		l/min	bar	bar	P & T	A & B	
SDM080/1/18/PSA	1						95
SDM080/2/2X18/PSA	2						127
SDM080/3/3X18/PSA	3	25	315	25	3/8"	1/4"	159
SDM080/4/4X18/PSA	4						191
SDM080/5/5X18/PSA	5						223
SDM080/6/6X18/PSA	6						255

The above models are fitted with cylinder spools, spring centre kits and standard handles.

	OPTIONS				
Туре	Part No.	Description			
1,2,3,4		Spool options - please refer to page A 10			
8	5V08102000	Spring Centre Kit			
11	5V11102000	Detent 3 Position			
AE	4TAP310007	Plug - High Pressure Carry Over			
AEK	4TAP310007	Plug - Closed Centre (fit 3/8" steel plug to top tank port)			
AEK	+ 3XTAP722160	Plug - Closed Cellule (III 3/8 steel plug to top talik port)			
LCB	5CLO102000	Joystick - mechanical			
		Microswitch option available upon request			
		Cable Control - please refer to page A 44			

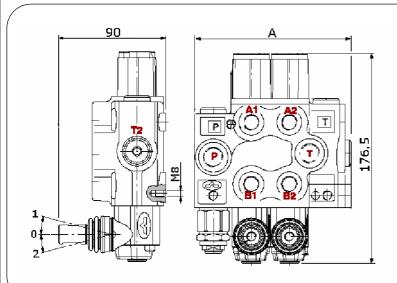



September 2018

A2